



ERGOCUT A 81



CE EN60974-7

CODE	↔	⚡
PAA106M-000-BA3	6 m 19.7'	1/4 GAS
PAA106M-071-BA3	6 m 19.7'	3/8 GAS
PAA106M-004-BA3	6 m 19.7'	CENTRAL
PAA106M-304-BA3	6 m 19.7'	TRAFIMECTOR®

TECHNICAL DATA		
HF		
1m	0,6 kg	1,32 lb
V PEAK	500	
5 bar		
155 l/min		
X 60%	80A	
X 100%	60A	
20÷25 mm		

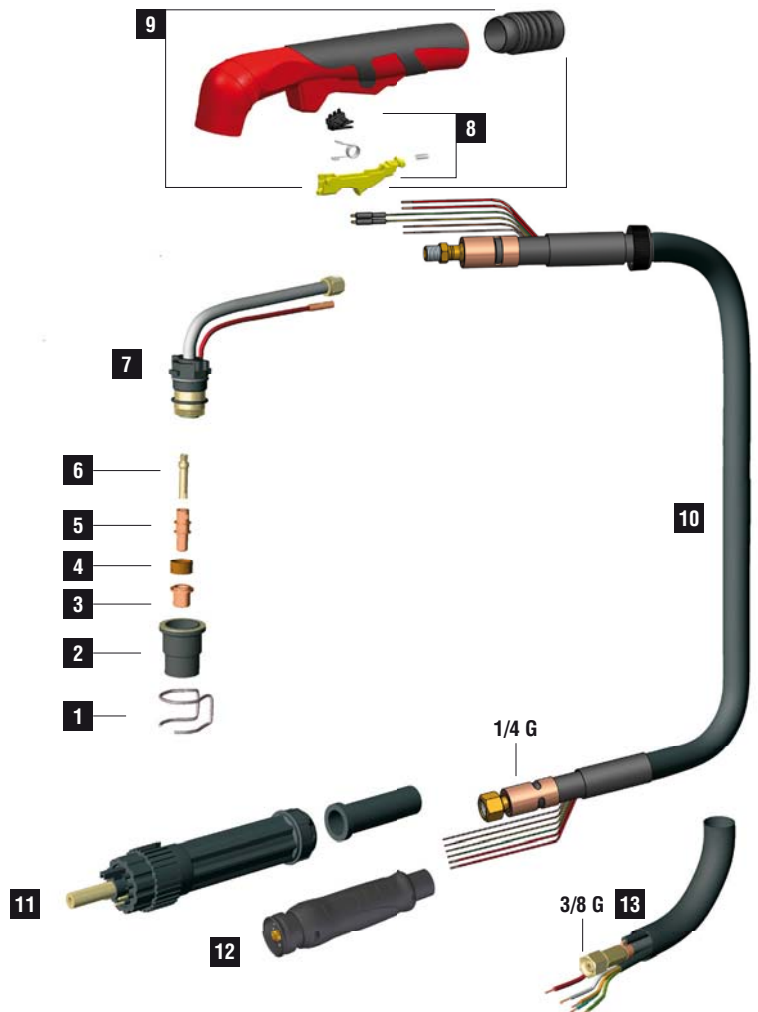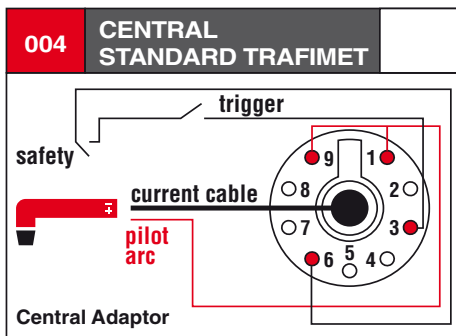

	CODE		Description	Ø	↔	CONTACT				DRAG		GOUGING	REF		
1	CV0026		plasma stand off guide		25,5 mm	•									2
1	CV0028		plasma stand off guide		20,5 mm		•								10
1	CV0033		plasma stand off guide		26 mm			•							2
1	CV0051		plasma stand off guide	24,3 mm	31 mm				•						1
1	CV0201		plasma stand off guide		30 mm					•					1
2	PC0115				35,4 mm	•	•	•	•						2
3	PD0105-10		50 A	1,0 mm	.040"	13,3 mm	•	•	•	•				-	10
3	PD0105-12		80 A	1,2 mm	.045"	13,3 mm	•	•	•	•					-
3	PD0106-12		80 A	1,2 mm	.045"	25,8 mm					•			-	10
4	PE0107		plasma diffuser				•	•	•	•				-	2
5	PR0109		plasma electrode		27 mm		•	•	•						10
5	PR0115		plasma electrode		39,5 mm					•					10
6	FH0560						•	•	•						1
6	FH0561									•					1

	CODE		Description	Quantity
7	EA0125			10
7	PF0140		plasma torch head	1
8	TP0400		kit trigger	1
9	TP0402		handle kit	1
10	PH4103		6 m - 1/4 G	1

	CODE		Description	Quantity
11	CY0002		cable support	1
11	FY0023		central adaptor	1
12	FY0090		TRAFIMECTOR®	1
13	PH4109		6 m - 3/8 G	1

STANDARD

CONTACT SHORT CONTACT LONG DRAG SHORT DRAG LONG

AUTO CUT A 81P



CE EN60974-7




CODE	↔	
------	---	--









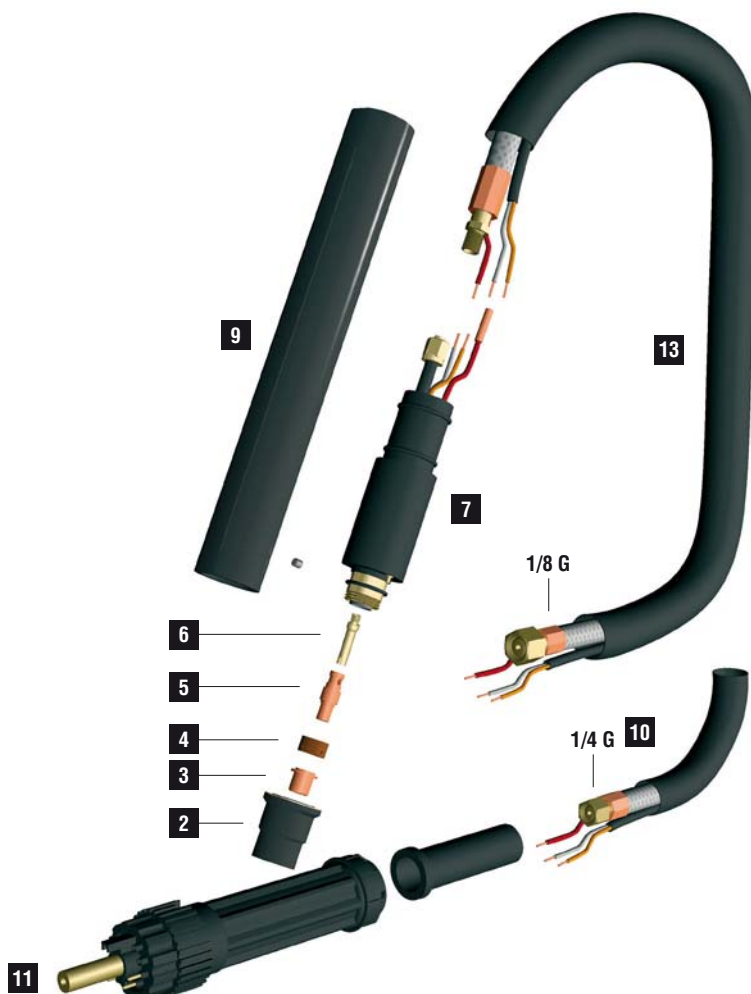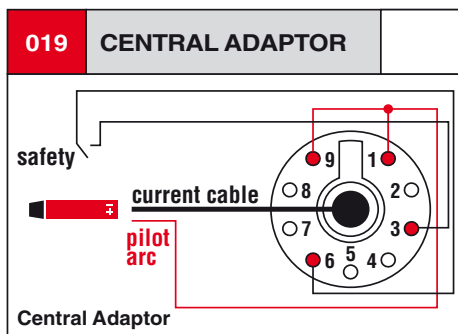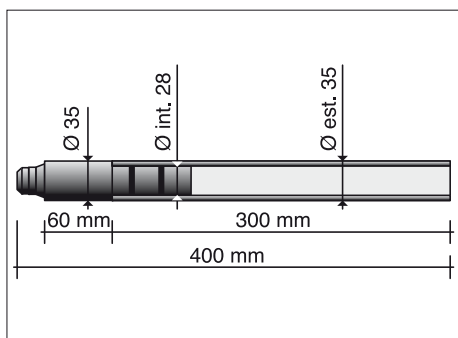







PA0180	6 m	19.7'	 3/8 GAS
--------	-----	-------	-------------







PA0181	6 m	19.7'	 CENTRAL
--------	-----	-------	-------------






TECHNICAL DATA	
----------------	--

	HF		
	1 m	0,6 kg	1.32 lb
	V PEAK	500	
		4 bar	
		155 l/min	
	X 60%	80A	
	X 100%	60A	
		20÷25 mm	



	CODE		Ø		CONTACT		REF		
									
2	PC0115				35,4 mm			2	
3	PD0105-10		50 A	1,0 mm	.040"	13,3 mm		-	10
3	PD0105-12		80 A	1,2 mm	.045"	13,3 mm		-	10
4	PE0107		plasma diffuser					-	2
5	PR0109		plasma electrode			27 mm			10
6	FH0560								1

	CODE	
7	EA0125	 10
7	PF0120	 plasma torch head 1
7	PT0030	 repair kit 1
9	TP0061	 1
10	PH0132	 6 m - 1/4 G 1

	CODE	
10	QB0097	 cover (mt) 100
11	CY0002	 cable support 1
11	FY0023	 central adaptor 1
13	PH0130	 6 m - 3/8 G 1

STANDARD

 CONTACT SHORT

 CONTACT LONG